
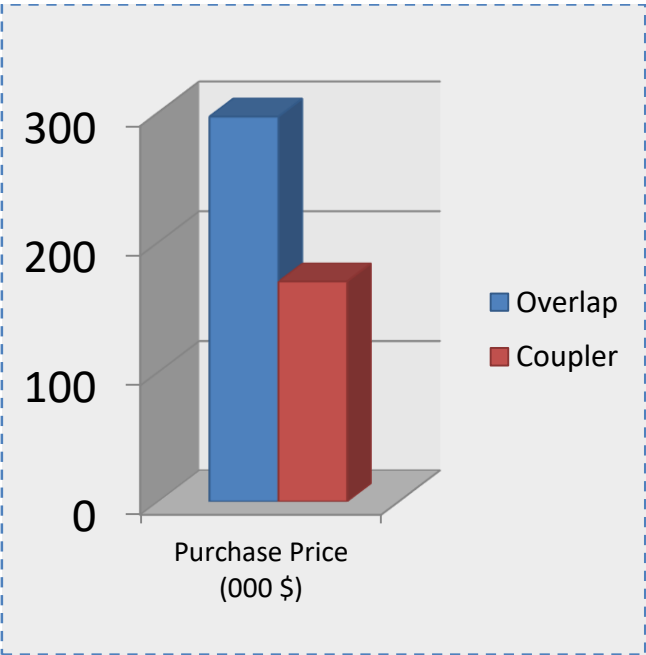


Regnum couplers provides time savings and cost efficiencies to the projects. Big contractors clearly know that even one day is important in construction schedules. Comparing to the traditional overlapping method, Regnum couplers save over 14.000 hour/person which is equal to 600 day/person in 100.000 sqm rough construction.

For 100.000 sqm rough construction, rebar costs are shown below:

Overlapping

- 300 tons of reinforcing bar is used for overlapping.
- 14600 man-hour is needed for assembly.
- 88.000 \$ assembly cost.

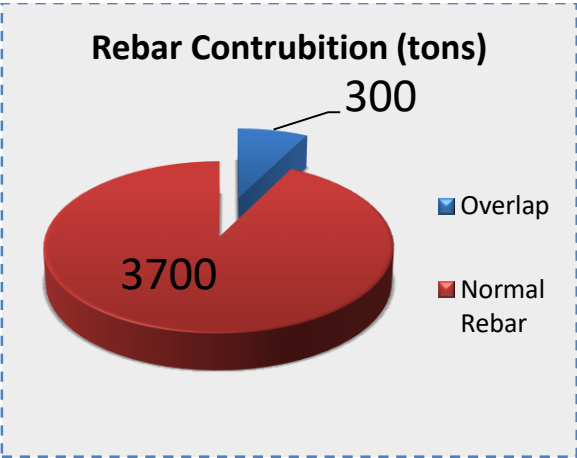

Mechanical Reinforcement Splicing

- No overlapping rebar is used.
- 285 man-hour is needed for assembly.
- 1700 \$ assembly cost.

